

2N7002

N-Channel MOSFET

Features

- Halogen free available upon request by adding suffix "-HF"
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Advanced Trench Process Technology
- High Input Impedance
- High Speed Switching
- CMOS Logic Compatible Input
- Marking : 7002/S72

Maximum Ratings @ 25°C Unless Otherwise Specified

Symbol	Rating	Rating	Unit
V_{DS}	Drain-source Voltage	60	V
I_D	Drain Current	115	mA
P_D	Total Power Dissipation	200	mW
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	625	°C/W
T_J	Operating Junction Temperature	-55 to +150	°C
T_{STG}	Storage Temperature	-55 to +150	°C


Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage ($V_{GS}=0Vdc, I_D=10\mu Adc$)	60	---	---	Vdc
$V_{th(GS)}$	Gate-Threshold Voltage ($V_{DS}=V_{GS}, I_D=250\mu Adc$)	1.0	---	2.5	Vdc
I_{GSS}	Gate-body Leakage ($V_{DS}=0Vdc, V_{GS}=\pm 20Vdc$)	---	---	± 100	nAdc
I_{DSS}	Zero Gate Voltage Drain Current ($V_{DS}=60Vdc, V_{GS}=0Vdc$) ($V_{DS}=60Vdc, V_{GS}=0Vdc, T_J=125^\circ C$)	---	---	1 500	μAdc
$I_{D(ON)}$	On-state Drain Current ($V_{DS}=7.5Vdc, V_{GS}=10Vdc$)	500	2700	---	mAdc
$r_{DS(on)}$	Drain-Source On-Resistance ($V_{GS}=10Vdc, I_D=500mAdc$) ($V_{GS}=5Vdc, I_D=50mAdc$)	---	1.2 1.7	7.5 7.5	Ω
$V_{DS(on)}$	Drain-Source On-Voltage ($V_{GS}=10Vdc, I_D=500mAdc$) ($V_{GS}=5Vdc, I_D=50mAdc$)	---	---	3.75 1.5	Vdc
G_{FS}	Forward Transconductance ($V_{DS}=10Vdc, I_D=200mAdc$)	80	---	---	ms
V_{SD}	Diode Forward Voltage ($V_{GS}=0Vdc, I_S=115mAdc$)	---	---	1.5	Vdc
I_S	Maximum Continuous Drain-Source Diode Forward Current	-	---	115	mA
C_{iss}	Input Capacitance	---	---	50	pF
C_{oss}	Output Capacitance	---	---	25	
C_{rss}	Reverse Transfer Capacitance	---	---	5	

Switching

$t_{d(on)}$	Turn-on Time	$V_{DD}=30Vdc,$ $V_{GEN}=10Vdc$	---	---	20	ns
$t_{d(off)}$	Turn-off Time	$R_L=150\Omega, I_D=200mA,$ $R_{GEN}=25\Omega$	---	---	20	

SOT-23

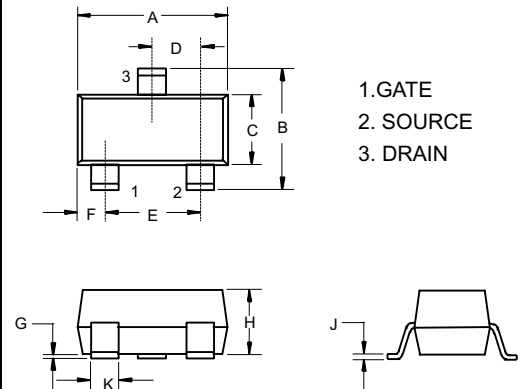

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.110	.120	2.80	3.04	
B	.083	.104	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	

Suggested Solder Pad Layout

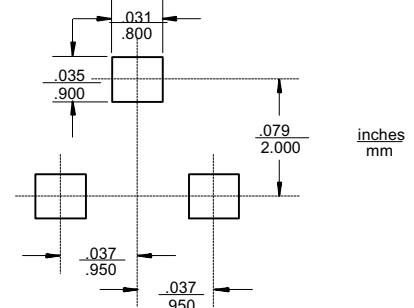


Fig. 1 – On-Resistance vs. Gate-to-Source Voltage

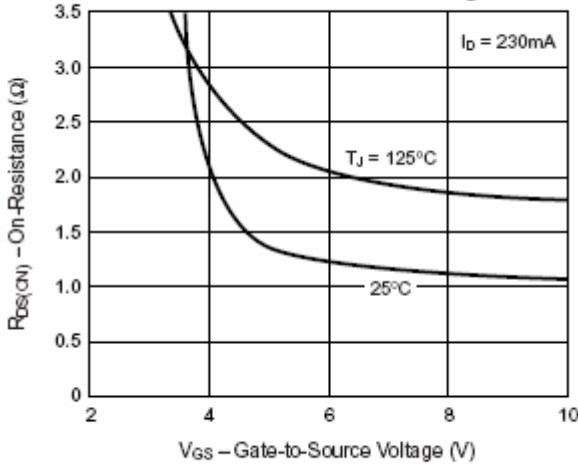


Fig. 2 – Source-Drain Diode Forward Voltage

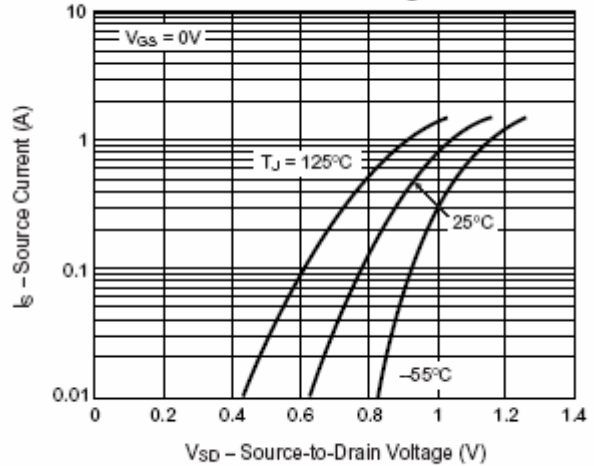


Fig. 3 – Output Characteristics

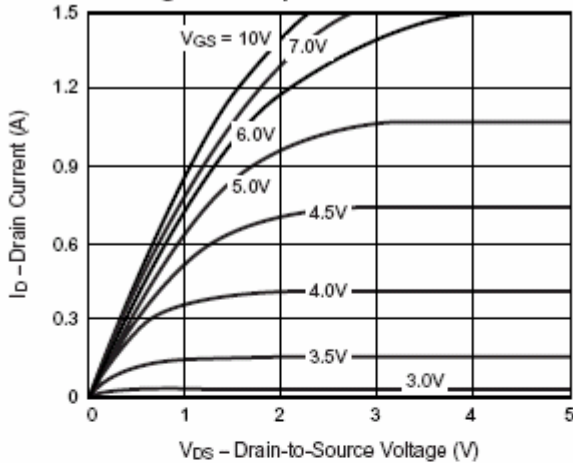


Fig. 4 – Transfer Characteristics

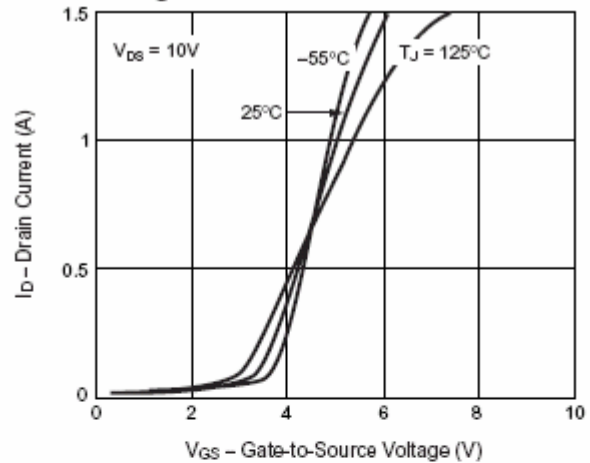


Fig. 5 – Capacitance


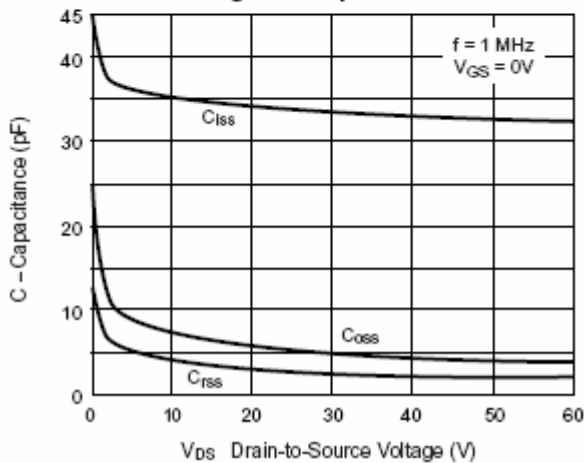


Fig. 6 – On-Resistance vs. Drain Current

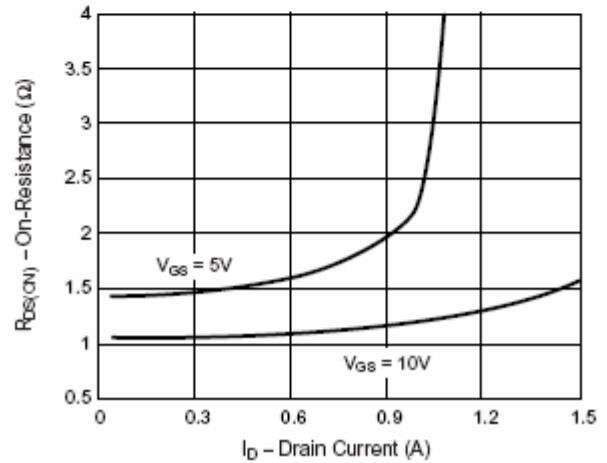

2N7002

Fig. 7 – Gate Charge

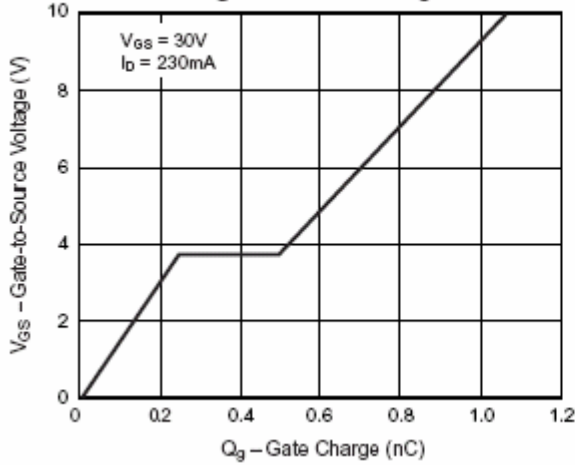


Fig. 8 – Breakdown Voltage vs. Junction Temperature

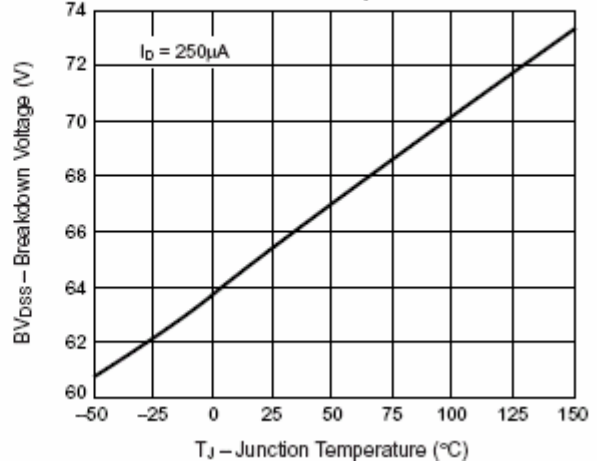


Fig. 9 – Threshold Voltage

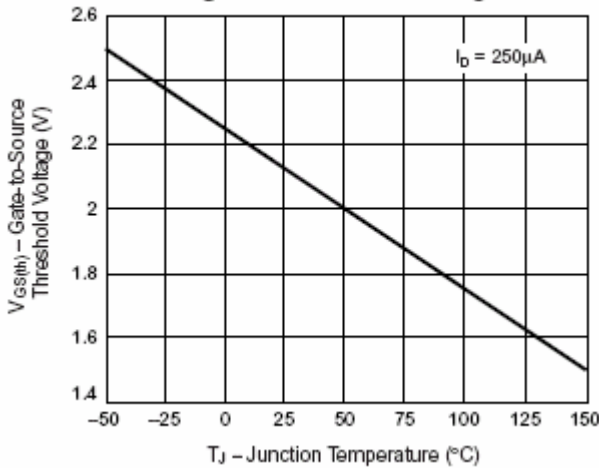


Fig. 10 – On-Resistance vs. Junction Temperature

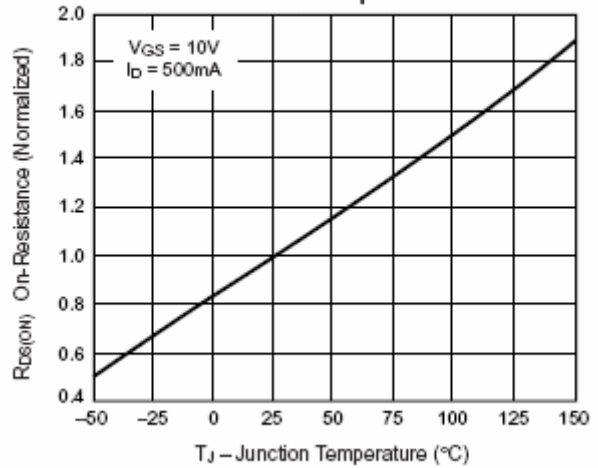


Fig. 11 – Thermal Impedance



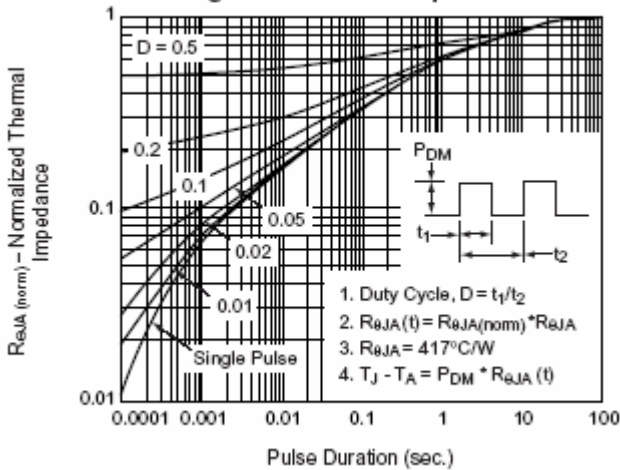


Fig. 12 – Power vs. Pulse Duration



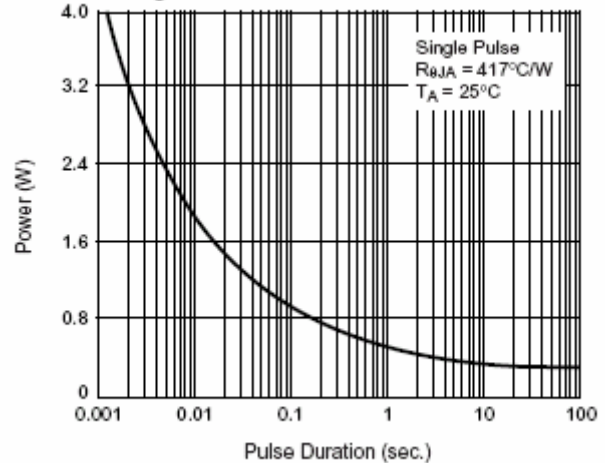

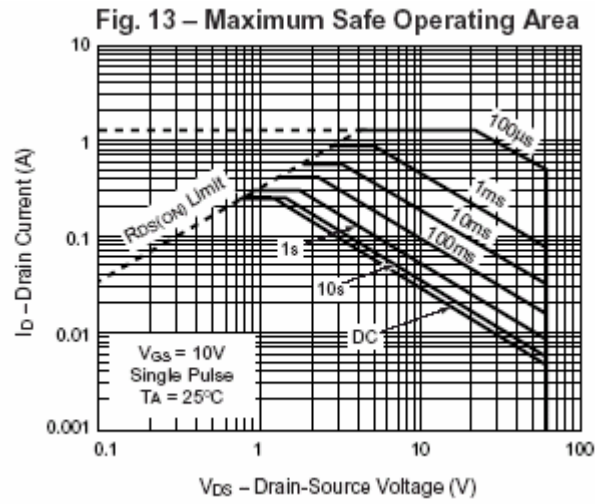

ZIBO MICRO COMMERCIAL
COMPONENTS CORP.

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 3Kpcs/Reel

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

*****LIFE SUPPORT*****

ZBMCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of ZiBo Micro Commercial Components Corp.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. ZiBo Micro Commercial Components Corp. is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. ZBMCC strongly encourages customers to purchase ZBMCC parts either directly from ZBMCC or from Authorized ZBMCC Distributors who are listed by country on our web page cited below. Products customers buy either from ZBMCC directly or from Authorized ZBMCC Distributors are genuine parts, have full traceability, meet ZBMCC's quality standards for handling and storage. ZBMCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. ZBMCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.